


BULLRING ROOF STRUCTURE (PHASE 1)

BULLRING SHOPPING CENTRE BIRMINGHAM B5 4BU

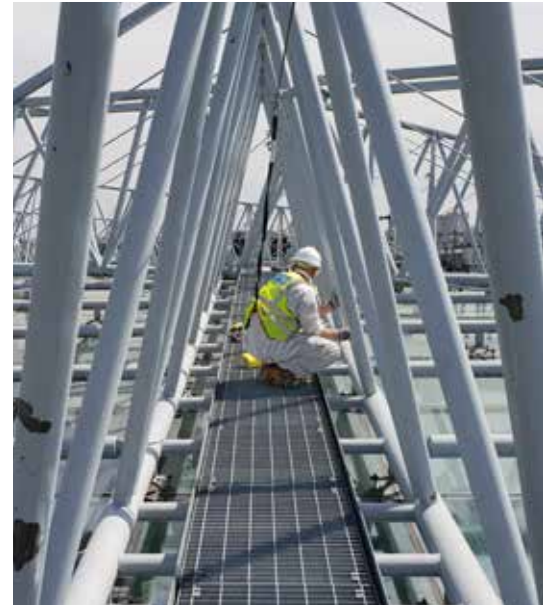

SCOPE OF WORK

In early 2018 we were awarded the contract by Workman LLP on behalf of the Bullring Shopping Centre in Birmingham, to carry out cleaning and repainting works on the external roof structure of the building.

Phase 1 of the works involved cleaning and preparing the existing painted steel structure to the required St 2 and St 3 preparation standard, as specified by the specialist coatings supplier Sherwin Williams. Once preparation was completed to the specified standard Macropoxy C88 (an epoxy primer / build coating) was applied, followed by Acrolon C237 (an epoxy top-seal coating) to all cleaned and prepared areas.

For safe and secure access we used Youngman boards and fall arrest Mansafe systems.

PROJECT NAME	Roof Structure (Phase 1)
LOCATION	Birmingham
CLIENT	Bullring Shopping Centre
PRINCIPAL CONTRACTOR	Workman plc
DURATION	12 Weeks
COMPLETION DATE	1st October 2018
SERVICES USED	St 2 and St 3 Surface Preparation
MATERIALS USED	Macropoxy C88 Acrolon C237



VariBlast Limited

Unit 3 Manor Farm Barns, Framingham Pigot, Norwich NR14 7PZ
+44 (0) 1508 493320 info@variblast.com variblast.com

Registered in England - Company No. 6469233 UTR Registration No. 3519028582 Vat Registration No. 935161725